2.4G Air Mouse & Keyboard User Manual

Product Diagram

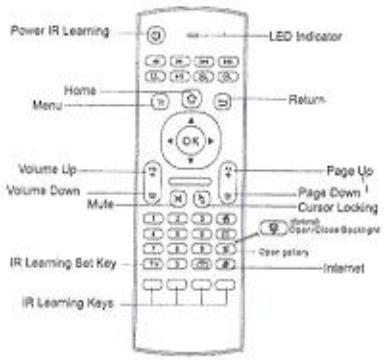

Air Mouse is a multi-axis device which integrates the functions of a keyboard , a mouse and a remote control. It supports Android Smart TV, IPTV, Networked set-top Box, Mini PC, Android TV Box, HTPC and PCTV. It's easy to use, just plug and play.

Important Notice: This is a universal controller. It is normal that few keys might not be applicable to your device because of different codes by different manufacture.

Specifications

(1) Transmission: 2.4G RF wireless;
(2) Sensor: 3-Gyro + 3-Gsensor;
(3) Number of keys: 81;
(4) Range: 10m;
(5) Battery Type: AAA*2;
(6) Material: Plastic and silicone;
(7) Size: 172*52*19MM;
(8) Weight: 100g.

About Backlit Control (Optional)

We have two modes of this air mouse .If you bought the backlit one,It is air mouse with backlight which helps a lot when using in poor lighting environments. Press the " ☼ " key, you can control the backlit function.

Function Keys (Note: different devices might use some specific codes, it is normal some keys do not function to your device.)		
	Android	Windows
	Power Off	Power Off / Sleep
	Rewind	Rewind
	Forward	Forward
	Previous	Previous
	Next	Next
	Play / Pause	Play / Pause
	Zoom in	Zoom in
	Zoom out	Zoom out
	Menu	Menu
	Back to Menu	IE
	Back	Mouse Right
	Up	Up
	Down	Down
	Left	Left
	Right	Right
OK	Mouse Left	Mouse Left
	Volume Up	Volume Up
	Volume Down	Volume Down
	Page Up	Page Up
	Page Down	Page Down
	Mute	Mute
	Mouse Lock	Mouse Lock
	Medium Player Shortcut	Medium Player Shortcut
	Email Shortcut	Email Shortcut
	Open gallery	Open gallery
(Optional)	Open/Close Backlight	Open/Close Backlight
	IE	N/A
	Backspace / Delete	Backspace / Delete
IR Remote Learning Keys		
TV	IR Learning	
Red	Learning 1	
Green	Learning 2	
Yellow	Learning 3	
Blue	Learning 4	

How to Use

Insert enclosed dongle into your device's USB port; pairing will be completed once you can see and move mouse cursor on the screen. If pairing was unsuccessful, press the OK key and TV key at the same time. Your device should now be connected.

IR Learning

There are 5 keys that can learn TV remote keys: the Power key and four color keys as showed in Product Diagram. Please be noted your TV remote has to support NEC protocol for learning. Example for learning "Power"key of TV remote controller:

1.Keep the IR emitters of the TV remote controller and the air mouse aligned with each other.
2.Press and hold the TV key on the air mouse,the red LED light will flash quickly and then stop flashing for a moment,at this time remove your finger. After a while , the red LED flashes slowly.The air mouse entered IR learning mode.
3.Press the TV key on the TV remote controller while the air mouse red LED light flashing slowly,then it is normally on, indicating the air mouse has received the code value that from TV remote controller.
4.Press the key of the air mouse that you need to learn,the red LED light becomes flashing slowly,which means the learning is successful.
5.After the success of learning, press TV key of the air mouse to save and exit the learning mode,and then red light turns off.

This procedure can be performed repeatedly until finished all learning.

Function Keys

Home: Go back to the home menu;
Return: Go back to previous screen;
OK: Confirm action or insert cursor;
Cursor Locking: Short press to lock the wireless mouse, another press to unlock it.

Wireless Keyboard

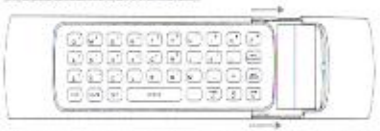

This keyboard has 38 keys as shown above.
Backspace: Delete
CAPS: Caps Lock （Switch Caps ON or Off）
ENTER: Confirm the operation
SPACE: Spacebar
ALT: Press Alt, to switch to top right corner characters, and press Alt again, to switch back.

FAQs

1. How to adjust sensitivity of the mouse?
Home + Volume Up　　move faster
Home + Volume Down　　move slower

2. The air mouse doesn't work or can not be recognized.

Firstly make sure that good batteries are inserted properly. Then plug the dongle to your device you want to pair with the air mouse, wait for 20 to 60s for the dongle driver to be installed. Press [OK] and [TV] button at the same time.

3. Some function keys such as [Return] and [OK] button don't work.

This is a universal controller. It is normal that few keys might not be applicable to your device because of different codes by different manufacture.
If you see the red LED light on when you press a key, it proves that the key is working. You can try the remote on a standard windows PC to test most functions.

4. My device always fails to learn from my TV remote.

Firstly please be noted your TV remote has to support NEC protocol for IR learning. Please check with your remote control manufacture to confirm this. If NEC protocol is supported, strictly follow IR Learning instructions section of this manual. Keep in mind that only the power key and the four bottom IR Learning keys can be programmed.

5. My air mouse moves very slow, or the mouse cursor disappears, or it returns wrong typing.

You're suggested to replace the batteries, re-plug the dongle, and then press [OK] and [TV] button at the same time for a new pairing.

6. The mouse cursor moves too fast. How to slow it down?

Firstly try to lower the mouse sensitivity by pressing [Home] and [Volume Down], if no obvious changes, go to your PC's control panel or your Android box's cursor speed to change the mouse sensitivity.

7. How to wake up the air mouse while it goes to auto-sleep?
Press any key to wake up the air mouse.

8. How to type Caps or numbers?
Press CAPS to switch Caps on or off.
Press ALT to switch between the blue colored characters and the white ones.

9. How to restore to manufacture default settings?

Please press [TV]+[Del] buttons together for three seconds to restore to manufacture settings.